





*Superior Design
Classic Value*

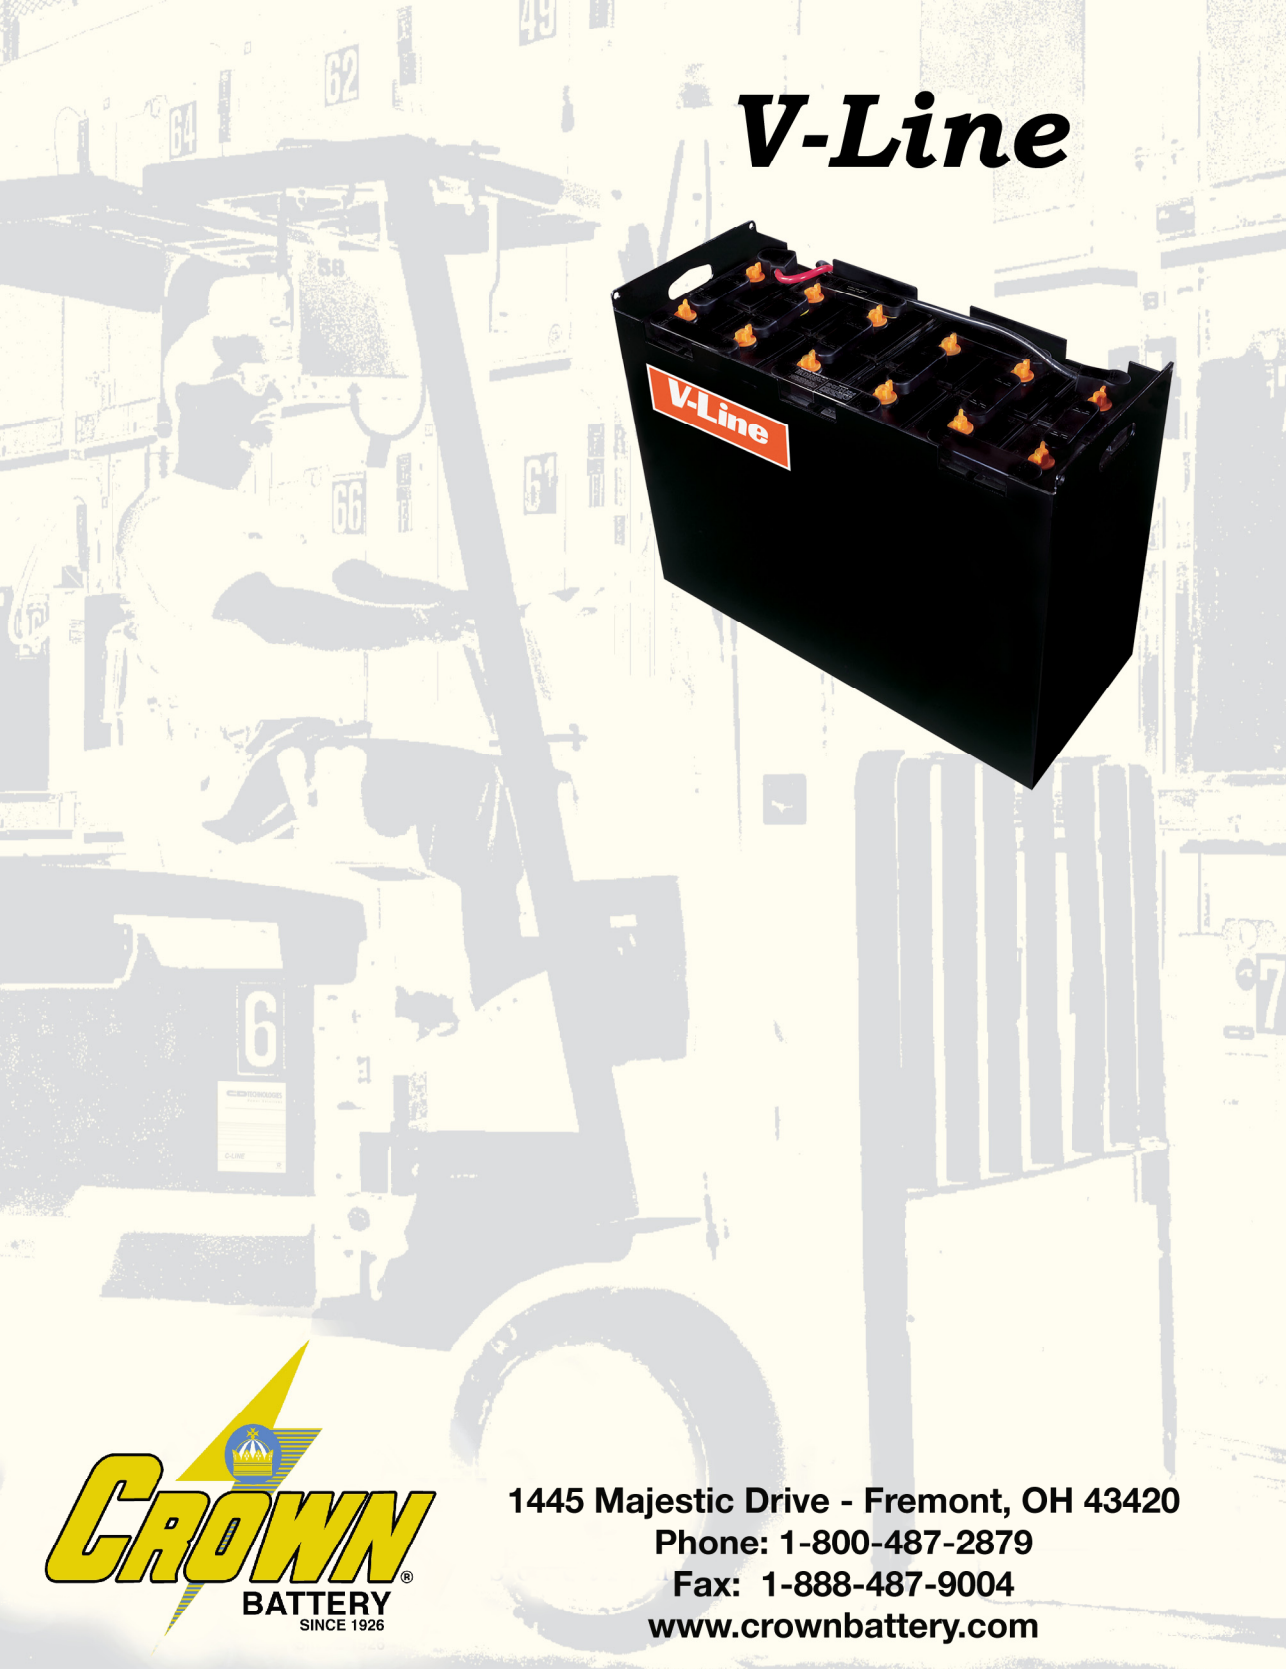

V-Line




1445 Majestic Drive - Fremont, OH 43420
Phone: 1-800-487-2879
Fax: 1-888-487-9004
www.crownbattery.com

V-Line



Built to Perform

- Unique, proprietary plate process ensures long life.
- A Slyver-Clad retention system delivers longer life and trouble free performance.
- A corrosion proof, baked-on epoxy tray finish ensures that the V-Line will look as good as it works for the life of the battery.

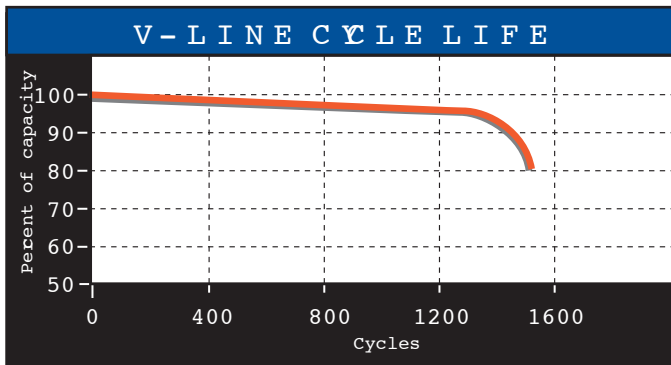

Designed for Life

- Flat-plate technology assures consistent capacity throughout the life of the battery.
- The V-Line's tapered grid design maximizes cross-sectional area for greater current handling capability, higher battery capacity and maximum capacity.
- Our unique plate support system and highly effective sediment notches combine to increase reliability and long life.



1445 Majestic Drive - Fremont, OH 43420

Phone: 1-800-487-2879

Fax: 1-888-487-9004

www.crownbattery.com

SPECIFICATIONS

TYPE V85 85 Ampere-hours/positive plate

Number plates	Cell capacity 6-hour rate		Estimated wet cell weight (trayed without cover)		Electrolyte volume	
	Ah	kWh	Lbs	Kgs	Gallons	Liters
5	170	0.33	31.6	14.3	0.7	2.6
7	255	0.49	42.4	19.2	0.9	3.5
9	340	0.66	55.9	25.4	1.3	4.8
11	425	0.82	67.6	30.7	1.5	5.8
13	510	0.99	80.3	36.4	1.9	7.1
15	595	1.15	92.9	42.1	2.1	8.0
17	680	1.31	105.5	47.9	2.5	9.3
19	765	1.48	117.3	53.2	2.7	10.2
21	850	1.64	129.0	58.5	2.9	11.1
23	935	1.81	140.7	63.8	3.3	12.4
25	1020	1.97	152.5	69.2	3.5	13.4
27	1105	2.13	164.2	74.5	3.9	14.7
29	1190	2.30	175.0	79.4	4.1	15.6
31	1275	2.46	186.8	84.7	4.4	16.5
33	1360	2.63	197.6	89.6	4.7	17.8

TYPE V100 100 Ampere-hours/positive plate

Number plates	Cell capacity 6-hour rate		Estimated wet cell weight (trayed without cover)		Electrolyte volume	
	Ah	kWh	Lbs	Kgs	Gallons	Liters
5	200	0.39	38.5	17.4	0.8	3.0
7	300	0.58	52.2	23.7	1.1	4.0
9	400	0.77	66.0	29.9	1.4	5.3
11	500	0.97	79.7	36.2	1.8	6.6
13	600	1.16	93.5	42.4	2.1	8.0
15	700	1.35	108.1	49.1	2.5	9.3
17	800	1.55	122.8	55.7	2.8	10.6
19	900	1.74	136.6	61.9	3.1	11.9
21	1000	1.93	150.3	68.2	3.5	13.2
23	1100	2.13	164.1	74.4	3.8	14.6
25	1200	2.32	177.8	80.7	4.2	15.9
27	1300	2.51	190.7	86.5	4.5	17.2
29	1400	2.71	204.4	92.7	4.9	18.5
31	1500	2.90	217.2	98.5	5.2	19.9
33	1600	3.09	230.1	104.4	5.6	21.2

TYPE V125 125 Ampere-hours/positive plate

Number plates	Cell capacity 6-hour rate		Estimated wet cell weight (trayed without cover)		Electrolyte volume	
	Ah	kWh	Lbs	Kgs	Gallons	Liters
5	250	0.48	49.4	22.4	0.9	3.5
7	375	0.71	67.1	30.4	1.3	4.9
9	500	0.95	83.9	38.1	1.7	6.6
11	625	1.19	100.7	45.7	2.1	8.0
13	750	1.43	118.4	53.7	2.6	9.7
15	875	1.66	136.2	61.8	2.9	11.1
17	1000	1.90	154.8	70.2	3.4	12.8
19	1125	2.14	172.5	78.3	3.7	14.2
21	1250	2.38	189.3	85.9	4.2	15.9
23	1375	2.61	207.1	93.9	4.7	17.7
25	1500	2.85	223.9	101.5	5.0	19.0

Standard heights for all V-LINE batteries

Cell type	w/out cover		w/dome cover		w/flat cover	
	in	(mm)	in	(mm)	in	(mm)
V85	22.63	(575)	23.25	(591)	23.75	(603)
V100	25.63	(651)	26.25	(667)	26.81	(681)
V125	30.63	(778)	31.00	(787)	31.75	(806)

Specifications are subject to change without notice. Contact your nearest Crown Battery sales office for the latest specifications. All statement, information and data given herein are believed to be accurate and reliable but are presented without guaranty, warranty, or responsibility of any kind, express or implied. The user should not assume that all safety measures are indicated, or that measures may not be required.